


# STORAGE TANK DISHED ENDS

STORAGE END Type A  
Shallow 'tank style' ends for storage or atmospheric vessels. Generally in accordance with BS2594.

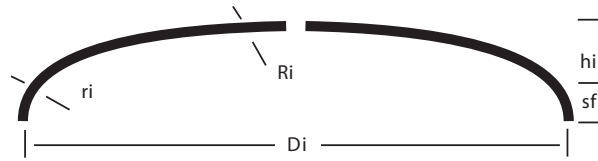

Di/Do mm	Ri mm	ri mm	Thk Min Max	hi mm	Vol litres
400	480	40	3-8	70	5
500	750	40	3-8	72	9.5
600	914	40	3-8	80	15
700	1000	40	3-8	91	23
800	1220	40	3-13	97	31
900	1372	40	3-13	105	42
1000	1524	40	3-13	118	56
1100	1524	40	3-13	130	75
1200	1676	40	3-25	139	94
1300	1676	40	3-25	158	123
1400	2134	40	3-25	147	135
1500	2134	40	3-25	164	170
1600	2134	40	3-25	183	213
1700	2134	40	3-25	203	263
1800	2438	40	3-25	200	291
1900	2438	40	3-25	219	352
2000	2438	40	3-25	241	423
2100	3048	40	3-25	215	423
2200	3048	40	3-25	233	499
2300	3048	40	3-25	252	585
2400	3048	40	3-25	273	684
2500	3048	40	3-25	294	795
2750	3810	40	3-25	284	934
3000	4500	40	4-25	286	1118
3250	4500	40	4-25	331	1501
3500	5000	40	4-25	344	1804
3750	5000	40	4-25	391	2337
4000	6000	40	5-25	371	2531
4250	6000	100	5-25	458	3763
4500	6000	100	5-25	505	4593
4750	6000	100	5-25	556	4869
5000	7000	100	5-25	530	5928
5250	7000	100	5-25	579	7053
5500	7000	100	5-25	629	8342
5750	7000	100	5-25	683	9817
6000	7000	100	5-25	739	11495

All intermediate diameters are possible.

$h_i$  and vol are theoretical and given for guidance only.

$R_i$  will vary slightly on spun heads.

Volumes & heights do not include straight flange.

Straight flange available up to a maximum of 75mm, dependent on material thickness.